



### Features:

- No UV or IR light radiation.
- Provide 45° beam angles.
- Easy Installation:  
Using Existing GU10 Fixture
- Very Low Power Consumption:  
Less than 6Watts
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Sturdy Construction:  
UV Stabilized PMMA Lens And Aluminium alloy Lamp Shell.
- High CRI: 60-85
- Correlated Color Temperature: 2700-6500K
- Operating temperature: -20°C~+60°C.
- 100~240V AC input.

### Benefits:

- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation

### Application:

- Track Lighting
- Accent Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum lighting
- Other lighting

**Product Specifications:**

Lens	PMMA
Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	GU10
Wattage	6W
Power Factor	PF $\geq$ 0.6
Operating frequency	50-60Hz
Operating Temperature	-20℃ $\sim$ +60℃
Storage Temperature	-30℃ $\sim$ +70℃
Net Weight per piece (g)	90g
Certification	CE Approved; ROHS Compliant

**Product Selection Guide:**


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GU10-HWW2W3C1	45	300 $\pm$ 5%	2800-3200K	Warm White	$\geq$ 60
GU10-HW2W3C1	45	260 $\pm$ 5%	5500-6500K	White	$\geq$ 70

**GU10-/H/XX/2W/3/C/1**

①                      ②                      ③                      ④                      ⑤                      ⑥                      ⑦

- |                                   |                  |
|-----------------------------------|------------------|
| ① GU10: Product Type.             | ⑥ C: AC 100-240V |
| ② H: High Power LED Type          | ⑦ 1: Crust type  |
| ③ XX: W( White ) WW ( Warm White) |                  |
| ④ 2W: The single LED power is 2W  |                  |
| ⑤ 3 : 3 pcs of LED                |                  |


**Product Dimensions:**

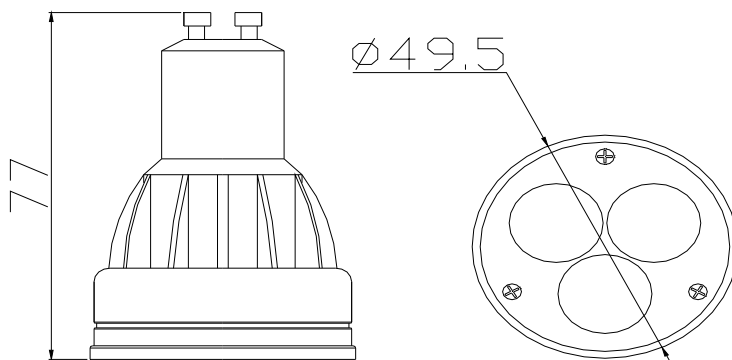

**NOTES:**

1. All dimensions unit in mm
2. Tolerances is  $\pm 0.5$  mm unless otherwise noted.

**Package Dimension:**

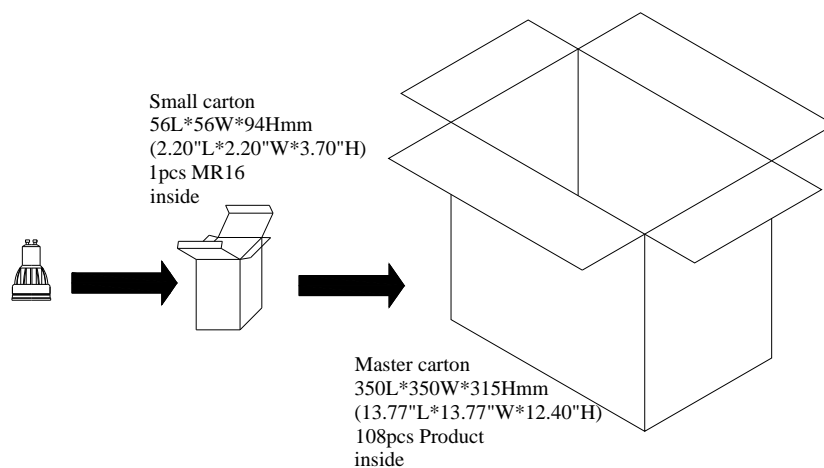

**Installation Instructions and Warnings:**

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.