



Features:

- No UV or IR light radiation.
- Lens angle can be 30/45/60.
- Very Low Power Consumption:
Less than 10Watts
- Long lifetime: 25000 hours (L₇₀).
- Sturdy Construction:
UV Stabilized PMMA Lens And Aluminium alloy Lamp Shell.
- High CRI: 75-80
- Correlated Color Temperature: 2700-6000K
- Operating temperature: -20°C ~ +60°C.
- 100-240V AC input.

Benefits

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Mall center lighting
- Corridor lighting
- Furniture lighting
- Hotel lighting
- Supermarket shopping mall lighting
- Other lighting

Product Specifications:

Lens	PMMA
Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Wattage	10W
Power Factor	PF \geq 0.7
Operating Frequency	50-60Hz
Operating Temperature	-20℃ \sim +60℃
Storage Temperature	-30℃ \sim +70℃
Net Weight per piece (Kg)	0.47Kg
Certification	CE Approved; RoHS Compliant
Size	H80*D94*90

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
CL-HWW10WC2C	45°	500 \pm 5%	2900-3300K	Warm White	\geq 80
CL-HW10WC2C	45°	550 \pm 5%	5000-6000K	White	\geq 75

CL-/H/XX/10W/C/2C/

① ② ③ ④ ⑤ ⑥

- ① CL: Ceiling light
- ② H: High Power LED Type
- ③ XX: W(White) WW (Warm White)
- ④ 10W: LED power is 10W
- ⑤ C: AC100-240V
- ⑥ 2C: Cree MCE LED


Product Dimensions:

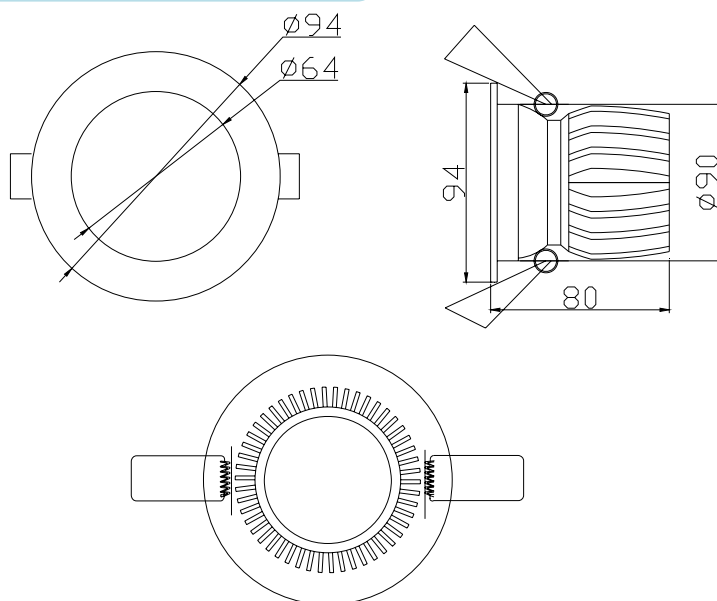

NOTES:

1. All dimensions unit in mm
2. Tolerances is ± 0.5 mm unless otherwise noted.

Package Dimension

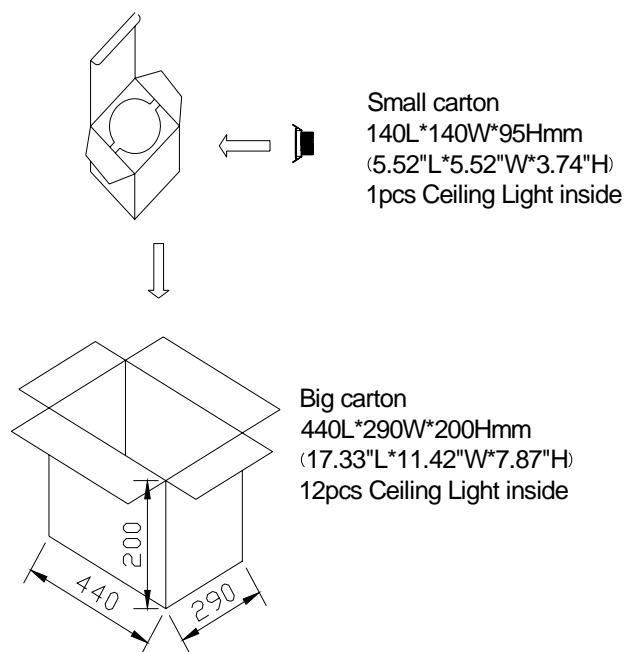

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.