



Features:

- No UV or IR light radiation.
- Provide 180° beam angles.
- Easy Installation:
Using Existing E27/E26/B22 Base Fixture
- Very Low Power Consumption:
Less than 9 Watts
- Long lifetime: 25000 hours (L_{70}).
- Sturdy Construction:
UV Stabilized PC Lampshade and Aluminium alloy Lamp Shell.
- High CRI: 70-80
- Correlated Color Temperature: 2700-12000K
- Operating temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$.
- 100~240V AC input.
- LED type: 24 PCS SMD LED

Benefits:

- Energy Cost Savings:
Over 60% Compared to Incandescent.
- Solid-State:
High-Shock & High-Vibration Resistant,
Both Electrical and Mechanical
- Eco-Friendly:
No Mercury, No Lead Content
- No Hazardous Emissions:
No UV or IR Radiation
- Constant Light Output:
Even Lighting, Non-Halation

Application:

- Track Lighting
- Accent / Spot Lighting
- Display / Cabinet / Kiosk Lighting
- Architectural Lighting
- Art Gallery and Museum Lighting
- Other Lighting

Product Specifications:

Lamp Shell	Aluminium alloy
Input Voltage	100~240V AC
Base Type	E27/E26 /B22Base
Wattage	9 W
Power Factor	PF \geq 0.7
Operating Frequency	50-60Hz
Operating Temperature	-20°C \sim +60°C
Storage Temperature	-30°C \sim +70°C
Net Weight per piece (g)	98
Certification	CE Approved; ROHS Compliant

Product Selection Guide:


Product	Beam Angle	Total Lumens	CCT	Color	CRI
GL-WW24CN	180°	800 \pm 5%	2700-3500K	Warm White	\geq 75
GL-W24CN	180°	850 \pm 5%	6000-6500K	White	\geq 70

GL/XX/24/CN

① ② ③ ④

- ① GL: Bulb Light
- ② XX: W(White) WW (Warm White)
- ③ 24: 24 pcs of LED
- ④ CN:AC100-240V input


Product Dimension:

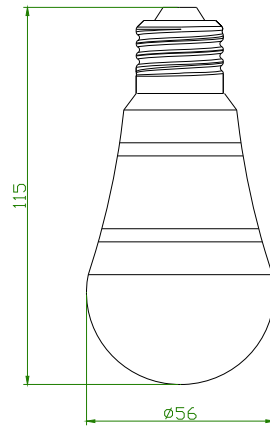


NOTES:

1. Dimensions are in millimeters.
2. Tolerances are ± 0.5 mm unless otherwise noted.

Package Dimension:



Small carton
60L*60W*125Hmm
(2.36"L*2.36"W*4.91"H)
1pcs Bulb light inside



Big carton
620L*320W*265Hmm
(24.41"L*12.60"W*10.43"H)
100pcs Bulb light inside

Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.